


FIXED MOUNTED TYPE: Rope Falls: 4/1

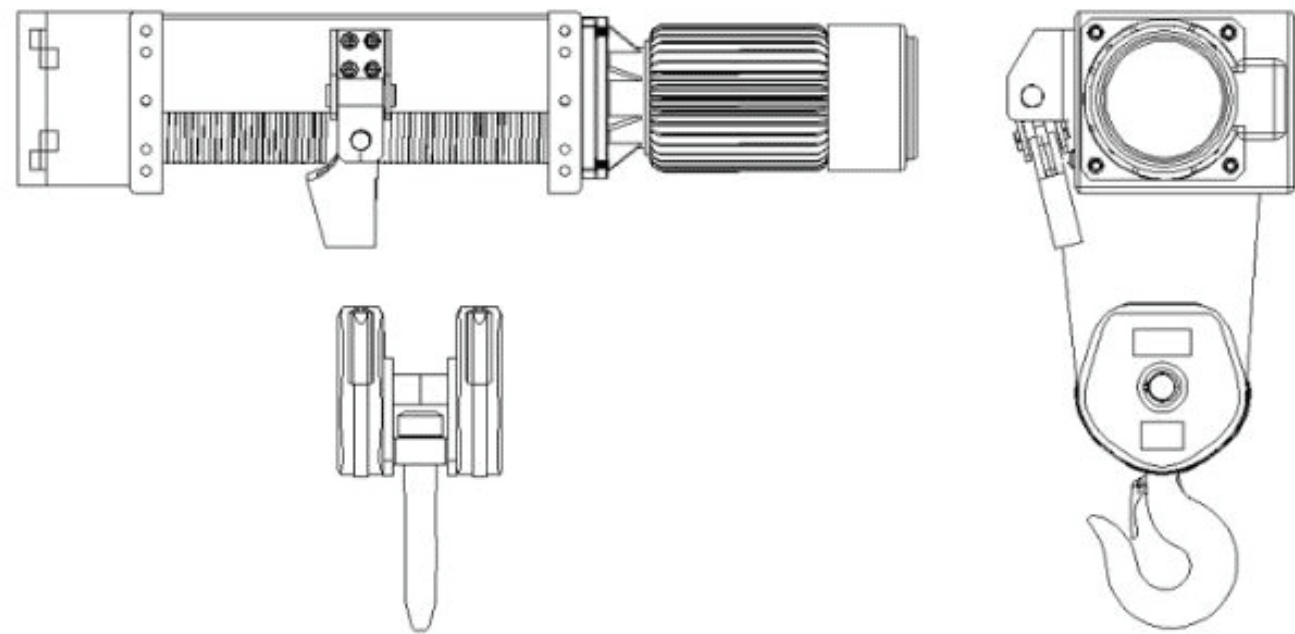

- ⊗ Lifting speed, traversing speed are based on a power supply frequency of 50HZ
- ⊗ Standard Voltage: 380V,415V
- ⊗ Standard FEM level of Lifting Motor is 40%ED, 60%ED can be done by requests.
- ⊗ Inventor Control can be installed to all model by requests. Inventor Control is more suggested for the hoists over 25 Tons.

Capacity Ton	No. of Rope Falls F/R	Lift Height M	Lifting Speed (m/min)		Model	
			Single Speed	Double Speed	Single Speed	Double Speed
2	4/1	8.5	4	4/1.33	L02CA04015U	L02CA04035U
		8.5	6	6/2	L02CA06015U	L02CA06035U
		11.7	4	4/1.33	L02CB04015U	L02CB04035U
		11.7	6	6/2	L02CB06015U	L02CB06035U
		15.0	4	4/1.33	L02CC04015U	L02CC04035U
		15.0	6	6/2	L02CC06015U	L02CC06035U
3	4/1	6.5	4	4/1.33	L03CA04015U	L03CA04035U
		6.5	6	6/2	L03CA06015U	L03CA06035U
		9.0	4	4/1.33	L03CB04015U	L03CB04035U
		9.0	6	6/2	L03CB06015U	L03CB06035U
		11.5	4	4/1.33	L03CC04015U	L03CC04035U
		11.5	6	6/2	L03CC06015U	L03CC06035U
		14.5	4	4/1.33	L03CD04015U	L03CD04035U
		14.5	6	6/2	L03CD06015U	L03CD06035U
5	4/1	7.0	4	4/1.33	L05CB04015U	L05CB04035U
		7.0	6	6/2	L05CB06015U	L05CB06035U
		9.0	4	4/1.33	L05CC04015U	L05CC04035U
		9.0	6	6/2	L05CC06015U	L05CC06035U
		11.5	4	4/1.33	L05CD04015U	L05CD04035U
		11.5	6	6/2	L05CD06015U	L05CD06035U
		15.0	4	4/1.33	L05CB04015U	L05CB04035U
		15.0	6	6/2	L05CB06015U	L05CB06035U
8	4/1	6.0	3	3/1	L08CB03015U	L08CB03035U
		6.0	4	4/1.33	L08CB04015U	L08CB04035U
		8.0	3	3/1	L08CC03015U	L08CC03035U
		8.0	4	4/1.33	L08CC04015U	L08CC04035U
		10.0	3	3/1	L08CD03015U	L08CD03035U
		10.0	4	4/1.33	L08CD04015U	L08CD04035U
		13.5	3	3/1	L08CB03015U	L08CB03035U
		13.5	4	4/1.33	L08CB04015U	L08CB04035U
10	4/1	6.0	3	3/1	L10CB03015U	L10CB03035U
		6.0	4	4/1.33	L10CB04015U	L10CB04035U
		6.0	6	-	L10CB06015U	-
		8.0	3	3/1	L10CC03015U	L10CC03035U
		8.0	4	4/1.33	L10CC04015U	L10CC04035U
		8.0	6	-	L10CC06015U	-
		10.0	3	3/1	L10CD03015U	L10CD03035U
		10.0	4	4/1.33	L10CD04015U	L10CD04035U
		10.0	6	-	L10CD06015U	-
		13.5	3	3/1	L10CB03015U	L10CB03035U
		13.5	4	4/1.33	L10CB04015U	L10CB04035U
		13.5	6	-	L10CB06015U	-
16	4/1	7.5	3	3/1	L16CC03015U	L16CC03035U
		7.5	4	4/1.33	L16CC04015U	L16CC04035U
		10.0	3	3/1	L16CD03015U	L16CD03035U
		10.0	4	4/1.33	L16CD04015U	L16CD04035U
		13.0	3	3/1	L16CB03015U	L16CB03035U
		13.0	4	4/1.33	L16CB04015U	L16CB04035U
20	4/1	6.5	3	3/1	L20CC03015U	L20CC03035U
		6.5	4	-	L20CC04015U	-
		6.5	2	2/0.67	L20CC02015U	L20CC02035U
		8.7	3	3/1	L20CD03015U	L20CD03035U
		8.7	4	-	L20CD04015U	-
		8.7	2	2/0.67	L20CD02015U	L20CD02035U
		12.0	3	3/1	L20CB03015U	L20CB03035U
		12.0	4	-	L20CB04015U	-
		12.0	2	2/0.67	L20CB02015U	L20CB02035U
		12.0	6	-	L20CB06015U	-
25	4/1	6.2	3	3/1	L25CC03015U	L25CC03035U
		6.2	4	4/1.33	L25CC04015U	L25CC04035U
		8.5	3	3/1	L25CD04015U	L25CD04035U
		8.5	4	4/1.33	L25CD04015U	L25CD04035U
		12.0	3	3/1	L25CB03015U	L25CB03035U
		12.0	4	4/1.33	L25CB04015U	L25CB04035U
		15.0	3	3/1	L25CF03015U	L25CF03035U
32	4/1	6.2	3	3/1	L32CC03015U	L32CC03035U
		8.0			L32CD03015U	L32CD03035U
		12.0			L32CB03015U	L32CB03035U

FIXED MOUNTED TYPE: Rope Falls: 4/2

Capacity Ton	No. of Rope Falls F/R	Lift Height M	Lifting Speed (m/min)		Model	
			Single Speed	Double Speed	Single Speed	Double Speed
3	4/2	6.9	4	4/1.33	L03BB04015U	L03BB04035U
		6.9	6	6/2	L03BB06015U	L03BB06035U
		9.4	4	4/1.33	L03BC04015U	L03BC04035U
		9.4	6	6/2	L03BC06015U	L03BC06035U
		12.8	4	4/1.33	L03BD04015U	L03BD04035U
		12.8	6	6/2	L03BD06015U	L03BD06035U
5	4/2	7.0	4	4/1.33	L05BB04015U	L05BB04035U
		7.0	6	6/2	L05BB06015U	L05BB06035U
		9.5	4	4/1.33	L05BC04015U	L05BC04035U
		9.5	6	6/2	L05BC06015U	L05BC06035U
		13.0	4	4/1.33	L05BD04015U	L05BD04035U
		13.0	6	6/2	L05BD06015U	L05BD06035U
8	4/2	5.0	4	4/1.33	L08BB04015U	L08BB04035U
		7.5			L08BC04015U	L08BC04035U
		10.5			L08BD04015U	L08BD04035U
		15.5			L08BB04015U	L08BB04035U
10	4/2	5.0	4	4/1.33	L10BB04015U	L10BB04035U
		7.5			L10BC04015U	L10BC04035U
		10.5			L10BD04015U	L10BD04035U
		15.5			L10BB04015U	L10BB04035U
16	4/2	6.3	6	4/1.33	L16BC06015U	L16BC06035U
		9.6			L16BB06015U	L16BB06035U
		14.4			L16BB06015U	L16BB06035U

FIXED MOUNTED TYPE: Rope Falls: 2/1

Capacity Ton	No. of Rope Falls F/R	Lift Height M	Lifting Speed (m/min)		Model	
			Single Speed	Double Speed	Single Speed	Double Speed
1	2/1	17.4	6	6/2	L01AA06015U	L01AA06035U
		22.7			L01AB06015U	L01AB06035U
2	2/1	9.9	6	6/2	L02AA06015U	L02AA06035U
		13.2			L02AB06015U	L02AB06035U
		16.4			L02AC06015U	L02AC06035U
3	2/1	8.2	4	4/1.33	L03AA04015U	L03AA04035U
		8.2	6	6/2	L03AA06015U	L03AA06035U
		11.0	4	4/1.33	L03AB04015U	L03AB04035U
		11.0	6	6/2	L03AB06015U	L03AB06035U
		13.8	4	4/1.33	L03AC04015U	L03AC04035U
		13.8	6	6/2	L03AC06015U	L03AC06035U
5	2/1	8.2	4	4/1.33	L05AA04015U	L05AA04035U
		8.2	6	6/2	L05AA06015U	L05AA06035U
		11.8	4	4/1.33	L05AB04015U	L05AB04035U
		11.8	6	6/2	L05AB06015U	L05AB06035U
		15.5	4	4/1.33	L05AC04015U	L05AC04035U
		15.5	6	6/2	L05AC06015U	L05AC06035U